

COMPANY OVERVIEW



OLAN GLOBAL TRADE COMPANY

is one of the key industry players globally and the pulp and paper industry leader in Russia in terms of market share, output and investment volumes.

International Paper, the world's largest pulp and paper manufacturer, is the strategic partner of Group.



MISSION

From tree to paper — we add value and improve the quality of life using a renewable natural resource. From Russia — worldwide.



VISION

We are the leading pulp and paper company in Russia. Through an international partnership, we implement global best practices in the Russian forest industry and ensure its global competitiveness.



VALUES

- Safety and Environment
- Sustainable Development
- Customer Focus
- Industry Leadership
- Compliance



Our Group is a responsible user of natural resources and a leader in voluntary forest certification.

All of Ilim's leased timberlands of 7.6 million ha are certified in accordance with FSC (Forest Stewardship Council®) and PEFC™ (Program for the Endorsement of Forest Certification schemes) standards.



Strategic location of our mills and plants ensures efficient supply of products to the key markets, including Russia, CIS, Europe, Southeast Asia, and China.



75%

of all domestically produced market pulp

20%

of all domestically produced board

10%

of all domestically produced paper

The Company's total annual pulp and paper output exceeds

3 000 000

tons

ENVIRONMENT

*is a responsible user of natural resources
and a leader in voluntary forest certification.*



The mark of
responsible forestry

All Branches of Group
have valid Forest Stewardship
Council® (**FSC**) and Program
for the Endorsement of Forest
Certification schemes (**PEFC**™)
certificates and confirm their
compliance with the strict
international standards annually*.

Group issues an annual
report which provides complete
information on the Company's
environmental efforts.



ISO 14001

40 Annual reforestation
efforts cover
thousand ha
of the harvesting area

over RUB 11 billion
to implement the projects meeting best available
technologies requirements (including strategic
projects) in order to reduce the environmental footprint



* FSC (FSC-C129100, FSC-C129102, FSC-C129099, FSC-C013771),
PEFC™ (NC-PEFC/FM-023735, NC-PEFC/FM-023019, NC-PEFC/FM-023737)

CORRUGATED MATERIALS

Product portfolio



kraftliner



semi chemical fluting




coated fully bleached liner



fully bleached liner

Output volume (thousand tons)

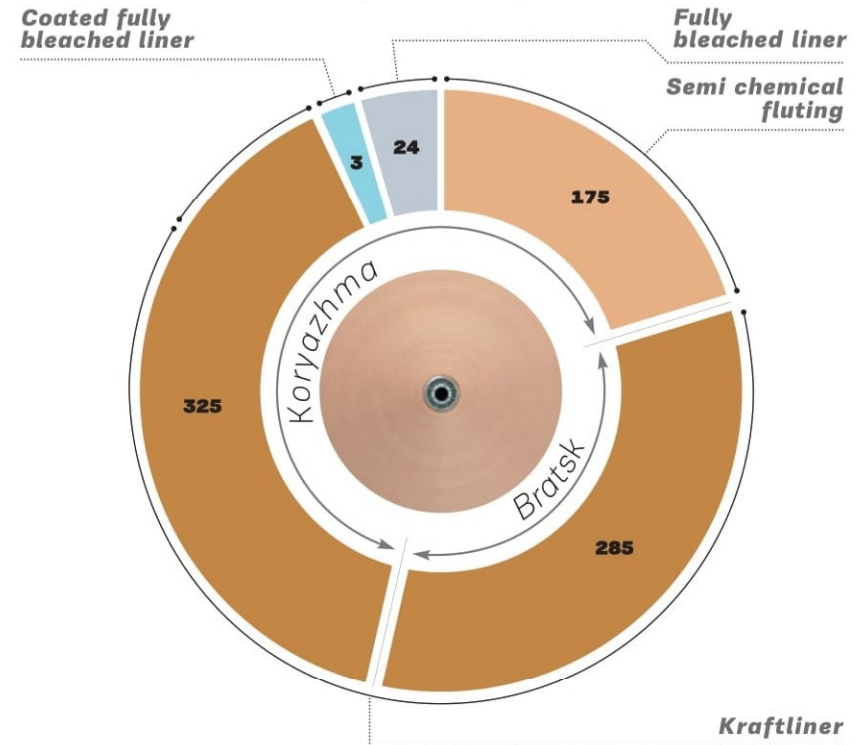

Output
volume



810 tons of corrugated materials per year



Packaging materials are manufactured at the Company's mills in



High-quality products made of **virgin fiber** with no recycled content




Wide range of solutions with a **tailored approach** to customer needs

PRODUCTS

Kraftliner PM4

Two-ply kraftliner made of 100% unbleached pulp is the key product of Ilim Group in the packaging materials line.

Used as liner. Exceptional physical and mechanical properties, excellent appearance and high processing speed makes kraftliner an optimal solution for production of industrial packaging.

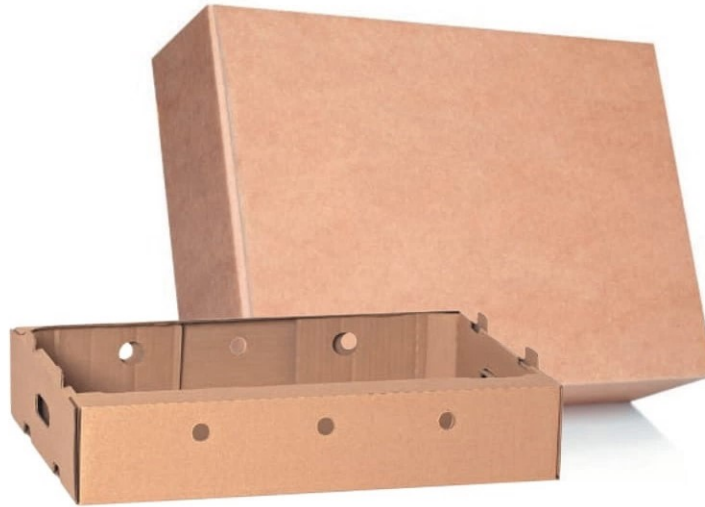

Superior physical and mechanical properties, high stacking strength



Made of 100% pulp and is suitable for food packaging



High water-resistant properties for a better use in the aggressive environment; full compliance with GOST and ISO requirements



Certificates: ISO 9001, ISO 14001, OHSAS 18001

Basis weights range from **115** to **275** g/m²



PM4

basis weights range, g/m²



from 115 to 275

trim width, mm



4 200



SPECIFICATION

Kraftliner

PM-4

The product is made of 100% natural virgin fiber without addition of recycled fiber

Parameters																		Testing method	
Grammage, g/m ²	115	120	125	130	135	140	150	160	165	170	175	186	195	200	225	250	275	ISO 536	
Bursting Strength, kPa																			
Typical	620	630	660	670	680	700	735	775	790	810	820	860	880	910	990	1000	1010	ISO 2758	
Guaranteed min	580	590	610	630	650	675	700	730	740	755	770	805	830	855	900	940	960		
Cobb ₆₀ test, g/m ² , min/max																			
top									20 – 35										ISO 535
bottom									50 – 80										
SCT CD, kN/m																			
Typical	2,30	2,40	2,60	2,65	2,75	2,85	3,00	3,10	3,20	3,30	3,45	3,70	3,90	4,05	4,50	4,70	4,90	ISO 9895	
Guaranteed min	2,15	2,20	2,40	2,50	2,55	2,60	2,85	2,95	3,00	3,05	3,15	3,50	3,70	3,80	4,30	4,40	4,50		
Moisture, %																			
min/max									7–9										ISO 287
Brightness, %																			
min/max									14–17										
Air Resistance (Gurley), s																			
Typical									70										ISO 5636/5
Guaranteed min									60										
Maximum basic weight tolerance ± 3 %																			
Conditioning of samples shall be conducted in accordance with ISO 187:1990 at relative humidity 50%±2% and temperature 23°±1°C																			

For Further Questions Email : management@olangemicilik.com.tr

Trade & Any Business Opportunities : a.golub@olangemicilik.com.tr

Whatsup Contacts

+380 67 483 66 69 Russian

+90 534 079 63 47 English

+90 546 852 58 47 Arabic & Turkish

